



SUNROTOR®
Solar Products
www.sunrotor.com
1(866) 246-7652

SR-12

Helical Rotor Submersible Solar Pump



- Nominal 110 volt operation
 - Usable voltage range 72-110 volts
 - Power range 570 watts to 1740 watts
 - Solar, battery or a combination
 - Maximum functional lift capability of 350 ft (107 m)
 - Max flow at 100 ft (30 m) is 15.1 gallons/min (57.2 liters/min) with 793 watts and 141.6 volts PV input
 - Highly reliable, single moving part progressive cavity technology
 - Readily repairable in the field
 - 1 inch FNPT output
- Submersion limit of 100 ft below static water level (ex: 100 ft submersion + 50 ft static water level: 150 ft)
 - 4" diameter (102 mm) fits 4.5" (114 mm) casing
 - Light weight - 23 pounds (10.4 kg)
 - Submersible motor protected from ambient water by oil filled jacket (food grade oil protects potable water source if vessel is compromised)
 - Brushless DC motor technology avoids conventional DC brush maintenance and replacement
 - All electronics are mounted above ground for longer life and easy access
 - Entire pump body is stainless steel to comply with all local code and pump installation requirements
 - CE certified
 - ISO 9001



SRC-M200T

DC Input Controller

- State of the art controller electronics contained in a NEMA standard weather resistant enclosure
- Clear cover allows visible inspection of connections and LED status lights
- Linear current boosting feature converts excess voltage into amperage
- Wide operational range with max input voltage tolerance of 200 volts (DC)
- Battery or solar capabilities with low voltage cutoff for battery protection
- Features low water cutoff and tank-full float switch input wiring terminals
- Variable timer control on low-water circuit
- Adjustable speed control
- Hinged enclosure door for easy accessibility to wiring terminals and controls
- Dimensions: 12" (30.5 cm) x 8" (20.3 cm)


The follow page lists the pump curves for each panel configuration. Do not exceed the depth listed for each configuration, as it can damage the pump and void the warranty.



SUNROTOR®
Solar Products
 www.sunrotor.com
 1(866) 246-7652

2 Year Warranty Outside the U.S.
5 Year Total Warranty for
Customers in the U.S./Canada

- 2 years at full replacement cost
- 3 years declining (60%, 40%, 20% of the original purchase price)

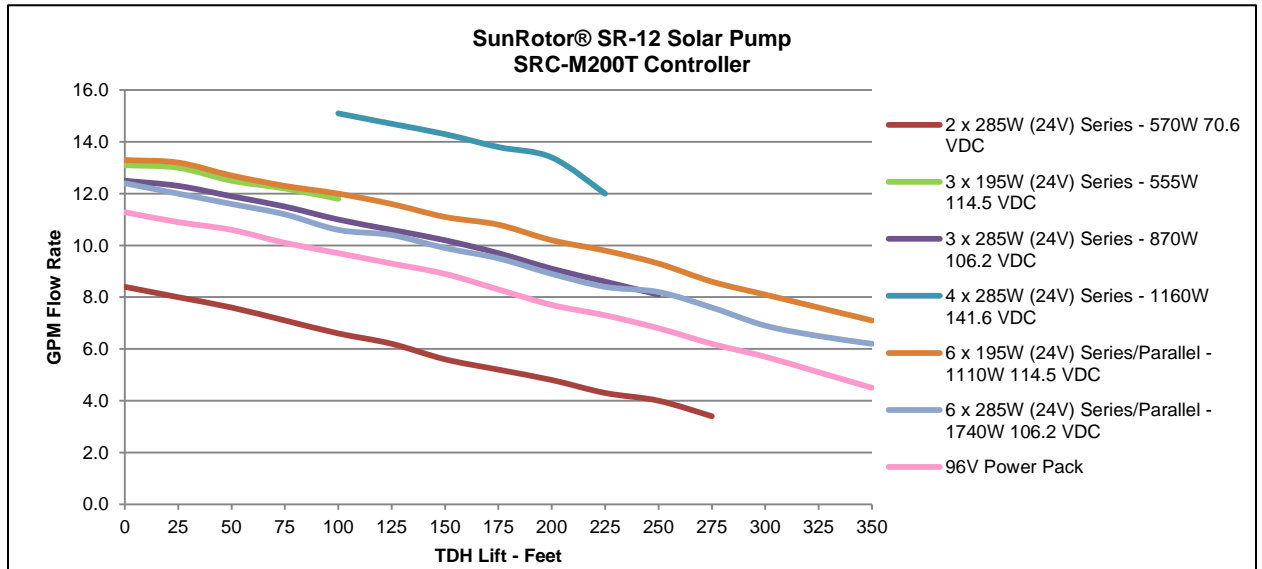

Panels	Configuration	Watts	Nominal Voltage	TDH Lift - Feet / GPM Flow Rate															
				0	25	50	75	100	125	150	175	200	225	250	275	300	325	350	
2	285 W (24V) Series	570	70.6 VDC	8.4	8.0	7.6	7.1	6.6	6.2	5.6	5.2	4.8	4.3	4.0	3.4				
3	195 W (24V) Series	555	114.5 VDC	13.1	13.0	12.5	12.2	11.8											
3	285 W (24V) Series	870	106.2 VDC	12.5	12.3	11.9	11.5	11.0	10.6	10.2	9.7	9.1	8.6	8.1					
4	285 W (24V) Series	1140	141.6 VDC					15.1	14.7	14.3	13.8	13.4	12.0						
6	195 W (24V) Series/Parallel	1110	114.5 VDC	13.3	13.2	12.7	12.3	12.0	11.6	11.1	10.8	10.2	9.8	9.3	8.6	8.1	7.6	7.1	
6	285 W (24V) Series/Parallel*	1740	106.2 VDC	12.4	12.0	11.6	11.2	10.6	10.4	9.9	9.5	8.9	8.4	8.2	7.6	6.9	6.5	6.2	
0	96V Power Pack*	N/A	96 VDC	11.3	10.9	10.6	10.1	9.7	9.3	8.9	8.3	7.7	7.3	6.8	6.2	5.7	5.1	4.5	

Panels	Configuration	Watts	Nominal Voltage	Amperage															
				0	25	50	75	100	125	150	175	200	225	250	275	300	325	350	
2	285 W (24V) Series	570	70.6 VDC	1.8	2.4	3.0	3.6	4.2	4.8	5.4	5.9	6.5	7.1	7.5	7.9				
3	195 W (24V) Series	585	114.5 VDC	2.8	3.3	4.0	4.6	5.1											
3	285 W (24V) Series	855	106.2 VDC	2.5	3.0	3.6	4.2	4.8	5.3	5.8	6.4	7.0	7.5	8.0					
4	285 W (24V) Series	1140	141.6 VDC					5.6	6.1	6.7	7.3	7.9	8.1						
6	195 W (24V) Series/Parallel	1170	114.5 VDC	2.8	3.3	4.0	4.5	5.1	5.6	6.1	6.7	7.3	7.8	8.2	8.7	9.2	9.7	10.3	
6	285W (24V) Series/Parallel	1710	106.2 VDC	2.6	3.0	3.6	4.2	4.8	5.3	5.9	6.5	7.0	7.6	8.0	8.4	9.0	9.5	10.0	
0	96V PowerPack	N/A	96 VDC	2.3	2.8	3.4	4.0	4.6	5.1	5.7	6.2	6.8	7.3	7.7	8.3	8.9	9.5	10.1	

10 gauge wire 8 gauge wire

* Contact us to learn more about the advantages of our higher wattage panel configurations for those in areas that average less than 5 peak sun hours daily

**Not intended for continuous 24/7 use. Subsequently, our warranty on battery-only systems are as follows: 1 year full replacement, and 18 months declining every 6 months (60%, 40%, 20%)